


Main Specifications



NO.	SPECIFICATION	UNIT	275G
A	Max.Operation Height	mm	3880
B	Bucket Pin Height	mm	3060
C	Cab Roof Height	mm	2000
D	Max.Height at Bucket Levelled	mm	2870
E	Length without Attachment	mm	2530
F	Length with Standard Bucket	mm	3460
H	Dumping Height	mm	2440
J	Reach Rollback	mm	610
M	Wheelbase	mm	1080
P	Ground Clearance	mm	180
R	Front Turning Radius without Attachment	mm	1180
S	Front Turning Radius	mm	2050
T	Rear Turning Radius	mm	1580
U	Tail Length	mm	980
V	Center Distance between Two Wheels	mm	1320
W	Bucket Width	mm	1820
G	Dumping Angle at Max.Height	°	40
K	Bucket Angle on Ground	°	29
L	Bucket Rollback Angle At Max.Height	°	96
Q	Start Angle	°	28

MACHINE MODEL	UNIT	275G I	275G II	275G III	275G IV	275G V
MAIN SPECIFICATION						
Engine Model		KUBOTA V3600-T-ET02	XINCHAI A498BZG	KUBOTA V3600-T-ET02	KUBOTA V3800DI-T-E3B-CSL2-1	KUBOTA V3800DI-T-E3B-CSL2-1
Emission Standard		EuroIIIA	Nation II	EuroIIIA	EuroIIIA	EuroIIIA
Rated Power	kW/rpm	63/2600	55/2500	63/2600	68.6/2400	68.6/2400
Operating Weight	kg	3500	3500	3500	3500	3500
Rated Payload	kg	1200	1200	1200	1200	1200
Bucket Capacity	m³	0.54	0.54	0.54	0.54	0.54
L×W×H	mm	3460×1820×2000	3460×1820×2000	3460×1820×2000	3460×1820×2000	3460×1820×2000
ENGINE SYSTEM						
Engine Model		KUBOTA V3600-T-ET02	XINCHAI A498BZG	KUBOTA V3600-T-ET02	KUBOTA V3800DI-T-E3B-CSL2-1	KUBOTA V3800DI-T-E3B-CSL2-1
Rated Power	kW/hp/rpm	63/86\2600	55/75\2500	63/86\2600	68.6/94\2400	68.6/94\2400
Displacement	L	3.62	3.168	3.62	3.769	3.769
Stroke	mm	98	98	98	100	100
Bore	mm	120	105	120	120	120
WEIGHTS						
Operating Weight	kg	3500	3500	3500	3500	3500
POWER TRAIN						
Travel Speed -F&R(unload)	km/h	11.8	11.8	11	11.8	11.8
TIRE						
Tyre		12×16.5	12×16.5	12×16.5	12×16.5	12×16.5
HYDRAULIC SYSTEM						
Hydraulic Flow – Standard	L/min/rpm	91	91	91	91	91
Loader Hydraulic Pressure	MPa	21	21	21	21	21
Hydraulic Flow – High Flow	L/min/rpm	135	135	135	—	135
Loader Hydraulic Pressure	MPa	19	19	19	—	19
OPERATING SPEC						
Rated Payload	kg	1200	1200	1200	1200	1200
Tipping Load	kg	2460	2460	2460	2460	2460
Breakout Force	kN	28.06	28.06	28.06	28.06	28.06
Traction Force	kN	25.9	25.9	25.9	25.9	25.9
SERVICE REFILL CAPACITY						
Chain Box, Each Side	L	9	9	9	9	9
Cooling System	L	12	12	12	12	12
Engine Crankcase	L	9	9	9	9	9
Fuel Tank	L	91	91	91	91	91
Hydraulic Tank	L	65	65	65	65	65

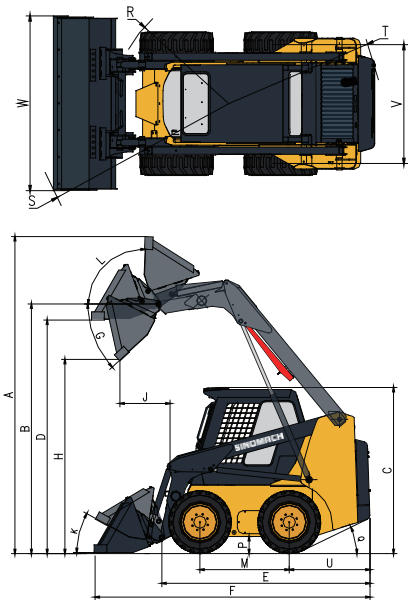

275G

SINOMACH-HI International Equipment Co.,Ltd.

额定功率 (Rated Power):KUBOTA 63kW@2600rpm KUBOTA 68.6kW@2400rpm XINCHAI 55kW@2500rpm
操作重量(Operating Weight):3500Kg 额定负载 (Rated Payload):1200Kg

SKID STEER LOADER
滑移装载机



国机重工集团国际装备有限公司

SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.

Add:No.898 West Huang He Road, Changzhou city, Jiangsu Province, China

PC:213136

Tel:+86 18206118629

Https://www.cnchanglin.com/

E-mail:sales8@changlin.com.cn



国机重工集团国际装备有限公司
SINOMACH-HI International Equipment Co.,Ltd.